




Saber One(SA1) 棒灯说明书 User Manual

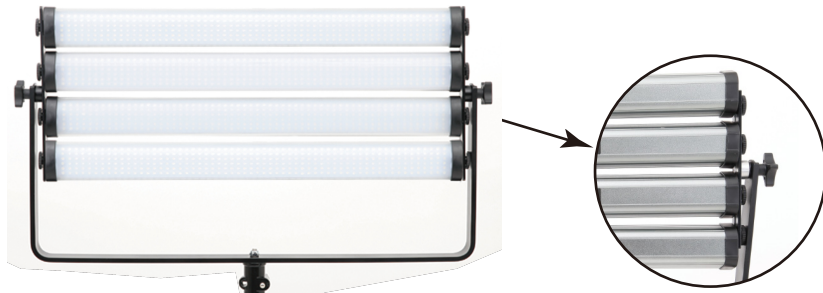

●SA1-U棒灯U架拼接示意
SA-1 With U-Bracket

E) 技术参数 Specifications:

型号Model no.:	Saber One (SA1)
LED个数 No. of LED bulbs	360pcs
功率Power	22w
色温Color Temperature	3200K,5000K,5600K,8000K
流明LUX (LUX)	2M(2200)/1M(8300)/0.5M(24000)
照射距离Illuminating Distance	5m
锂电池Li-ion Battery	7.4V,4600mAh
充电时间Charging time	~3.5hrs
使用时间Working time	~1hr (at max. output)
尺寸Dimensions (LxWxH)	605x 60 x 660mm
重量Weight	1kg
包含配件Accessories included:	MP-155A手柄, 连接片, 充电器, SA1-BAG棒灯布袋 MP-155A handel, connector, adaptor, carrying bag
选购配件Optional Accessories	SA1-U棒灯U架, SPR-200B-4棒灯连接配件, SA1-S4 棒灯连接件 SA1-U U-Bracket, SPR-200B-4 X-bracket, SA1-S4 T-Bracket

以上LUX数据测量均使用ISO: 640感光度测量 The above LUX figure is recorded under ISO:640

F) 使用注意事项 Attention ⚠

1. 非专业人士, 请勿随便拆卸, 否则后果自负。
 2. 使用环境应保持干燥、通风注意防潮防水。
 3. 产品表面有轻微的油渍及污渍请使用清洁布擦拭表面即可清除。
 4. 请避免硬物将其划伤以至影响使用效果。
 5. 灯体内置锂电池, 贮存长时间的, 请在使用时充满电再使用。
 6. 使用产品时, 请仔细阅读说明书。
1. Repair the light only by professionals.
 2. Keep the environment dry and ventilated when using the product.
 3. For best performance of product, maintain cleanliness of the products by wiping the surface with a clean cloth.
 4. Do NOT scratch / apply pressure to the product.
 5. Recharge the battery from time to time to enhance battery life.
 6. Read the user manuals carefully before using the product.



感谢您选购锐鹰公司的产品!

如欲了解更多相关产品的信息, 请联系您当地的经销商或访问我们的网页。使用产品之前, 请先仔细阅读说明书。

Thank you for purchasing FalconEyes' products.

For further details of our related products, please contact your local distributor or visit our webpage at www.falconeyes.com.hk

Thank you.

Please read this manual carefully before using this product.

E-mail: info@falconeyes.com.hk


Website: www.falconeyes.com.hk

A) 产品概述 Product Overview

莎贝尔Saber One系列手持互控式LED补光棒，是一款百变智能LED摄像灯，设计有A/B/C三个组别控置，可多灯同时或分组调节，每个色温值均可无极调光，并设计四档色温快速切换3200/5000/5600/8000K，大大方便外拍效率，棒灯内置电池，铝合金壳体，标配了手柄、包、充电器，可多灯不同角度无限拼接使用，非常适合人物摄影摄像补光使用，外带方便，小巧灵活。

The Falcon Eyes Saber One is a handheld LED light stick with the new mutual control technology, it is designed with A,B,C three group control channels in order to adjust multiple lights simultaneously or in groups. with dimmable power output. In order to make it more user friendly, we have designed with 4 often used color temperatures 3200/5000/5600/8000K as quick selection to convenient the outdoor photography. It is with built-in battery, aluminum housing, grid handle, kit bag, charger, and amazingly a multiple light connection system. It is very handy and flexible, easy to carry around and suitable for portrait as a fill light.

B) 配件清单与功能示意图 Accessories list&Panel Diagram

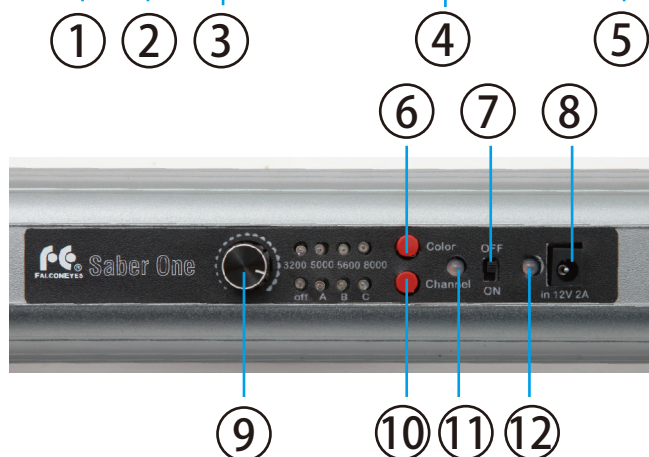

1. 棒灯布袋Carrying Bag
2. 连接片Connectors
3. MP-155A 手柄Handel
4. 充电器Charger
5. 棒灯SA1
6. 色温按钮CCT button
7. 电源开关Switch
8. DC充电插口Power socket
9. 调光旋钮Output knob
10. 频道按钮Channel button
11. 电源指示灯Power indicator
12. 充电指示灯Charging indicator

C) 操作说明 Operating Instructions

●色温Color Temperature (CCT)

1. 莎贝尔棒灯设计了四档色温快速切换功能，分别为3200K、5000K、5600K、8000K，使用时可以随意切换灯光色温。

1. 4 pre-set CCT are built-in : 3200K, 5000K, 5600K, 8000K so that user can switch to desired CCT easily.

2. 切换色温请按动灯体面板上“Color”色温按钮,即可快速切换，如切换到相应色温的位置上红色指示灯会亮起。

2. By pressing the CCT Button, user can switch to the preferred CCT, corresponding indicating light will lights up.

●互控Mutual control function

1. 莎贝尔棒灯带有互控功能，共分为A\B\C三组，可以通过互控控制同一频道的灯光；如将所有的灯光同时调到A组，此时可以通过一支灯来控制所有灯光的色温与亮度；用户也同时可以将灯具设定为B组及C组灯光，同时设定不同灯光参数，也可以选择Off关闭互控，单独控制。

1. SA1 employs mutual control function in three channels: A/B/C, lights in the same channel can be controlled. For example, set all the lights to channel A and control them via 1 SA1 or set to channel B and C with different settings.

2. 切换互控频道请按动灯体面板上“Channel”频道按钮，即可快速切换互控频道以及关闭互控，如切换到相应频道的位置上红色指示灯会亮起。


2. Press the Channel button to adjust to different channels, or turn off the mutual control function, corresponding indicating light will Lights up.

D) 多灯拼接安装示意 Multi-lights Installation

●选购配件Optional Accessories



●拼接示意Installation

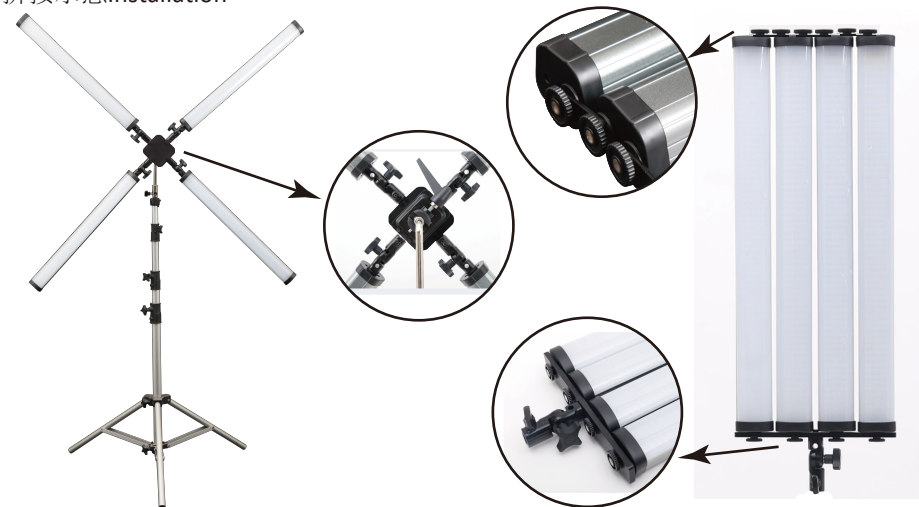

●SPR-200B-4棒灯连接配件拼接示意
SA1 with SPR-200B-4 X-Bracket

●SA1-S4棒灯连件 拼接示意
SA1-S4 with T-Bracket