

## D) 技术参数 Specifications:

型号 Model no.:	LP-DB2245-SY/AB	LP-DB2245CT-SY/AB
LED个数 No. of LED bulbs	224pcs	
功率 Power	112w	
流明 LUX (LUX)	0.5M(25000)1M(10000)2M(2700)	
色温 Color Temperature	5500K-6000K	3000K-7000K
电压 Voltage	15V/7A	15V/10A
适配器 AC Adaptor	SP-AC15(15v/7A)	SP-AC15(15v/10A)
电池座 Battery Holder	✓	
尺寸 Dimensions (LxWxH)	61 x 22x 9cm	
重量 Weight	3.2kg	
包含配件 Accessories Included	Bag, Diffusor, SPR-200A	
选购配件 Optional Accessories	MV-AD2/LI - ION Batter/Honeycomb	

## E) 使用注意事项 Attention ⚠

1. 请勿带电插拔：（不使用时应断开电源，即插入或拔出连接时应先 把电源开关关掉）
  2. 非专业人士，请勿随便拆卸，否则后果自负。
  3. 使用环境应保持干燥、通风注意防潮防水。
  4. 产品表面有轻微的油渍及污渍请使用清洁布擦拭表面即可清除。
  5. 请避免硬物将其划伤以至影响使用效果。
  6. 凡是购买本产品的买家请根据灯背后电池座配用电池。
  7. 使用产品时，请仔细阅读说明书。
1. Make sure the power is off after use.
  2. Do NOT plug/unplug when the power is still connected.
  3. Since there can be high voltage inside the unit, Do NOT open or repair the unit yourself. If there is any defect, please contact an experienced technician.
  4. Keep the environment dry and ventilated when using the product. Do not leave or use the flash in humid or dusty environment.
  5. For best performance of LEDs, maintain cleanliness of LEDs by wiping the surface softly with clean cloth.
  6. Do NOT apply pressure to the product.
  7. Only use the specific Li-ion camcorder batteries according to the model of the battery holder on the rear panel
  8. Read this manual carefully before using the product.



LP-DB2245-SY/AB LP-DB2245CT-SY/AB

LED灯说明书

LED Panel Instruction Manual



感谢您选购锐鹰公司的产品！

如欲了解更多相关产品的信息，请联系您当地的经销商或访问我们的网页。使用产品之前，请先仔细阅读说明书。

**Thank you for purchasing FalconEyes' products.**

**For further details of our related products, please contact your local distributor or visit our webpage at [www.falconeyes.com.hk](http://www.falconeyes.com.hk)**

**Thank you.**

**Please read this manual carefully before using this product.**

E-mail: [info@falconeyes.com.hk](mailto:info@falconeyes.com.hk)

Websit: [www.falconeyes.com.hk](http://www.falconeyes.com.hk)

## A) 产品概述 Product Overview

LP-DB 系列 LED 灯带有调光功能, 拥有亮度高色温稳定、节能及寿命长等优点。

LP-DB 系列 LED 灯外观新颖, 灯的内部设计电路结构安全稳定, 采用 DC 供电, 同时可选配松下, 索尼电池座, 方便简单。

LP-DB2245CT LED 灯可调色温, 根据客户需要可调不同色温, 这一特性使它成为现代摄影师的首选。

LP-DB series LED panel with the dimmer function. The LEDs used are flicker-free and produce stable color temperature. The LED panel is highly luminous, heat-free, energy efficient and extraordinarily durable.

LP-DB series LED lighting has a stable internal circuit. It can be operated with DC power (Compatible with Sony or

Anton Bauer camcorder battery) which is convenient for outdoor photography.


Adjustable color temperature (3000K-7000K)

The color temperature adjustment function of this LED panel shows changing of color temperature clearly and allows easy operation for users.


## B) 功能示意图 Panel Diagram



LP-DB2245-SY/AB

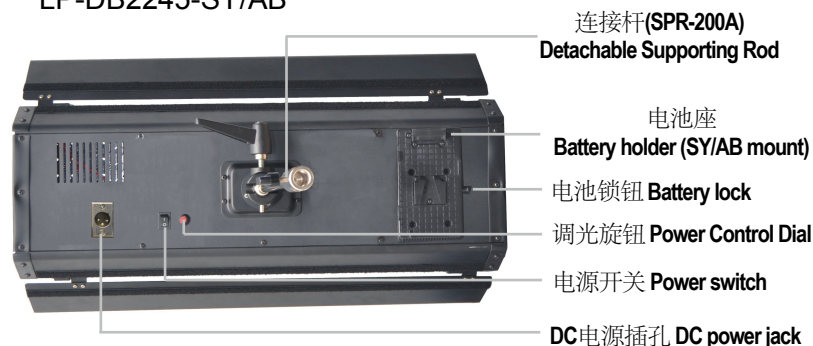

LP-DB2245CT-SY/AB

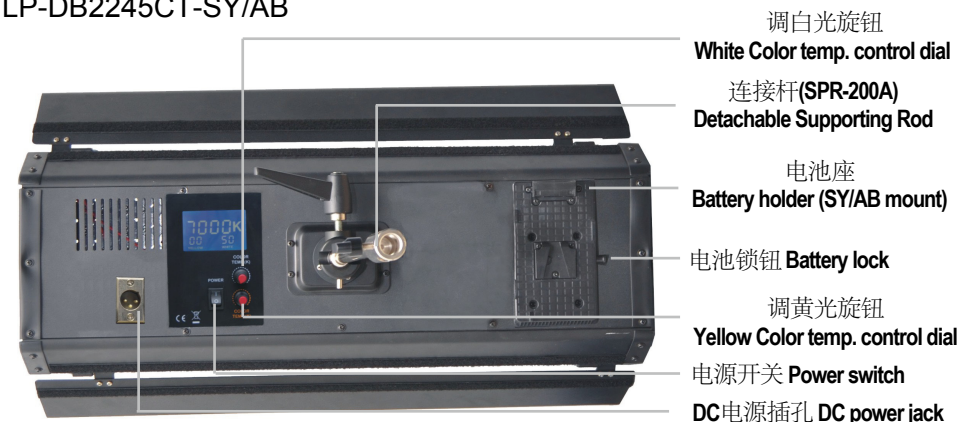

索尼电池座 (SY)  
Sony battery holder (SY)



松下电池座(AB)  
Anton Bauer battery holder(AB)

## C) 操作说明 Operating Instructions

### 普通LED灯使用 LED Lighting with dimmer:

- 1.插入电源之前, 请检查电源开关是否关闭状态。(电源开关拨到0是关闭状态拨到1是已打开状态。)
- 2.插入电源, 打开开关后用户根据所需的光线转动调光旋钮。
1. Please ensure the power is switched off before plugging the power cable into the socket ("0"=OFF, "1"=ON)
2. Power can be adjusted by the power control dial.

### 可调色温LED灯使用 LED lights with adjustable color temperature :

- 1.插入电源之前, 请检查电源开关是否关闭状态。(电源开关拨到0是关闭状态拨到1是已打开状态。)
- 2.插入电源, 打开开关后用户根据所需光线调节白光、黄光, 调节色温的同时LCD显示屏会显示出当前色温。
- 3.用户如需暖色调, 请将底下的黄光旋钮根据需要, 向右调节。调到最大时LCD显示屏上显示色值3000K (白光旋钮向左边调到最小)。
- 4.用户如需冷色调, 请将上面的白光旋钮根据需要向右调节, 调到最大时LCD显示屏上显示色值7000K (黄光旋钮向左边调到最小)。
- 5.当白光旋钮和黄光旋钮同时调到最大时, 色温值是5000K。
1. Please ensure the power is switched off before plugging the power cable into the socket ("0"=OFF, "1"=ON)
2. Color temperature can be adjusted from 3000K to 7000K and the current value will be shown on the LCD display screen.
3. To create warmest color temperature, turn the white color temp dial to its left end and the yellow dial to its right end. The LCD then shows "3000K".
4. To create coolest color temperature, turn the yellow color temp dial to its left end and the white dial to its right end. The LCD then shows "7000K".
5. To create day light color temperature, turn both dials to their right ends. The color temperature reaches 5000K.

### 电池座安装 Battery installation:

安装电池座时直接安装无须按住按钮, 退出电池时请按住电池座锁钮可将电池退出。  
Install the battery onto the holder directly. Uninstall the battery by pressing the battery lock after use.