


FALCONEYES
 Your Studio Professional

PATENT PRODUCT!



LED 小型聚光灯
脉冲星P5 50W
PULSAR


Falcon Eyes new PULSAR series is a small LED Fresnel which is able to create different effects with different accessories.

The first PULSAR series, P-5, is a 50W LED Fresnel equipped with high quality LED chip which can reach a CRI of 97 and TLCI of 98. The beam angle can adjust from 12°-51°. The front adaptor is able to adapt to Falcon Eyes SGA series flash accessories like barn door, snoot, honeycombs, color gel, softbox, etc. to create different effects. The housing of P-5 is CNC aluminum housing which is very durable and light on weight. Which is fit for outdoor operation.

A delicate control box is attached with LCD touch screen control. Desirable light can be adjusted easily. They've also designed to have the mutual control system (Share your move function) allowing an easy operation for multiple units.

Single color version can chose color between 3200K or 5600K alternative, and Bi-color version will be from 3000K-5600K, which will be available shortly.



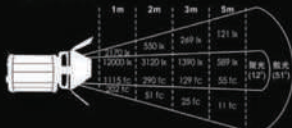

说展最新款的脉冲星系列是一个可以配合不同的配件制造出不同效果的小型LED聚光灯。

脉冲星系列的第一款型号P-5是一台50W的高效LED聚光灯，显色度97的TLCI更高达98。聚光及泛光角度可以在12°-51°之间调整。灯的前部配有转接器，可以配合锐鹰的SGA系列配件如挡光板、束光筒、蜂巢、柔光箱、色罩等等使用，从而制造出不同的光效。P-5机体采用了CNC铝压铸，机体非常轻巧而且耐用，方便携带到户外使用。P-5配备了触屏控制盒，令你可以更准确地调节输出，调出理想的光源。P-5更加入了互控功能，令你使用多灯操作时更得心应手。

P-5单色型号提供3200K(黄光)或5600K(白光)两款，而双色型号则可3000K调至5600K，现接受预订。


锐鹰有限公司
 Tel: +852 2363 3856
 Fax: +852 2363 3866
 Email: info@falconeyes.com.hk

国内总代理:
深圳市元科摄影器材有限公司
 Shenzhen YK PHOTO EQUIPMENT COMPANY CO., LTD.
 深圳市福田区福田红岭世界贸易广场B座18D
 1801室 Tel: +86 755 8258 8877
 Fax: +86 755 8258 0451 QQ: 289004343 289043442

国内经销商:
 北京 Tel: 010-6199 1383 杭州 Tel: 0571-8694 3287
 成都 Tel: 028-6666 6136 东莞 Tel: 0769-8649 0269
 长沙 Tel: 0731-8821 1701 烟台 Tel: 0535-6666 6136
 佛山 Tel: 0755-2556 8876 广州 Tel: 020-6101 0538
 贵阳 Tel: 0851-8193 7399 上海 Tel: 021-6101 0538


FALCONEYES
 Your Studio Professional

PATENT PRODUCT!



LED平板柔光灯
LPW-100TD






FALCONEYES
 Your Studio Professional

PATENT PRODUCT!

LED卷布灯
RX-8T





Spread Softbox
 扩散柔光箱 RX-08T


Softbox 柔光箱 RX-58T

PRODUCT SPECIFICATION 产品参数

Model No. 型号			
LEDs & Power LED灯泡数及功率	1pcs x 50W	504pcs x 0.5W	80pcs x 0.5W
Output Wattage 输出功率	50W	100W	18W
Color Temperature 色温	5600K	3000K-5600K	3200K and 5600K Alternative 3200K或5600K二合一
Operating Voltage 工作电压	DC-15V 5A	DC-15V 7A	DC-9V 3A
Compatibility 兼容性	AC Adaptor适配器	AC Adaptor适配器 Sony V Mount Battery (DC) V接口电池座	AC Adaptor适配器 Sony F Mount Battery 锂电池
Dimming 调光	0-100% Stepless Dimming 0-100% 无极调光	0-100% Step-less dimming 0-100%无极调光 Color Temperature色温 3000K-5600K(TD Version Only)	0-100% Stepless Dimming 0-100% 无极调光
Beam Angle 照射角度	12°-51°	62°	65°
Control Function 调控方式	ON/OFF 开关 Touch Screen 触屏 Mutual Control 互控	Turning Knob 旋钮 Touch Screen 触屏 DMX-512 WiFi Application 无线WiFi	Turning Knob 旋钮
CRI 显色度	97	95	93
Lux 流明	(FLOOD 散光) 0.5M:8870 1M:2170 2M:550 3M:269 5M:121 (FOCUS 聚光) 0.5M:37000 1M:12000 2M:3120 3M:1390 5M:589	0.5M:9790 1M:2350 2M: 615	0.5M:1660 1M:406 2M: 106
Footcandles 英尺烛光	(FLOOD 散光) 0.5M:824 1M:202 2M:51 3M: 25 5M:11 (FOCUS 聚光) 0.5M:3439 1M:1115 2M:290 3M: 129 5M:55	0.5M:910 1M:218 2M: 57	0.5M:154 1M:38 2M:10
Mounting Method 安装配套	L-Bracket L架	U-Bracket U架	MPH-2B
Dimensions 机身尺寸	234x145mm	455x240x101mm	210x210mm
Weight 重量	1.65KG	3.6KG	Light 布灯:0.4KG
In the box 配件	L-Bracket L架 Carry Bag 布袋 Adaptor DC-15V 5A 适配器DC-15V 5A AD-PS1	AC Adaptor 适配器DC-15V U-Bracket U架 Carry Bag 布袋 Reflector 反光布	AC Adaptor 适配器 DC-9V 3A MPH-2B
Optional Accessories 选购配件	Light Stand 灯架: I-2001/B FGA-D8150/FGA-HC1010/FGA-CS FGA-S82030/西贡挡光板 SGA-CF色罩/转接头	V Mount Battery 锂电池 BP-160L Light Stand: I-2501 WiFi USB RECEIVER WiFi USB接收器 (LPW 只限LPW型号)	Spread Softbox 扩散柔光箱: RX-CB8T Softbox 柔光箱: RX-SB8T

大型蜂巢屏

LHC-24(2.4x2.4m) LHC-36(3.6x3.6m) LHC-60(6.0x6.0m)

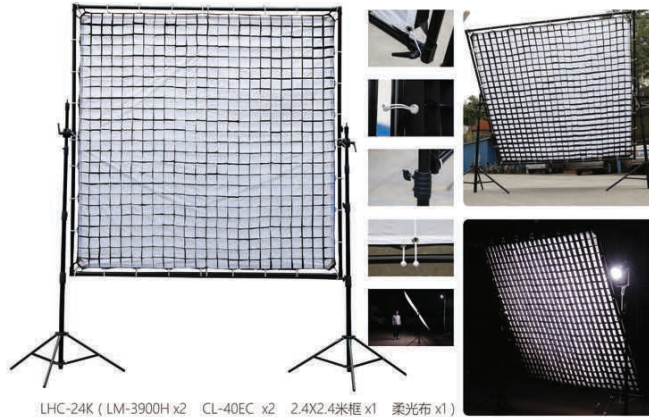

LHC-24K (LM-3900H x2 CL-40EC x2 2.4X2.4米框x1 柔光布 x1)

挂墙臂架WB-2100



摇臂灯架JHS-01MC



大型蜂巢屏CR-B1520HC

